

SIDEKICK GLASS TRANSPORTATION TRAILER

Payload capacity: 2,000 lbs

GVWR: 3,320 lbs

Strong 1/8-inch thick 6061 T6 aluminum posts and slats

T6 Aluminum A-Frame 8-foot x 7-foot Glass Racks

Extra storage space between racks

Extra padding on top of fender for easier loading

LED Lighting



Dual pole settings on ledge for securing glass of varying thickness

Usable 5-inch glass support ledge with rubber block pads

Padded front stop

Six T6-Adjust-A-Poles with five fully-adjustable black neoprene cleats



2-inch wide padding runs entire length of horizontal slats

Rubber padding from top to bottom of vertical posts

Equipped with electric brakes and breakaway system for enhanced safety

Utilizes a standard coupler for 2-inch ball hitch


Connects to tow vehicle with standard 7-way light plug

Specifications subject to change.




Upgrade to Premium T6-Super-Poles

Supertruck System 2 scissor-style cleats adjust forward, backward and to any position up or down the pole

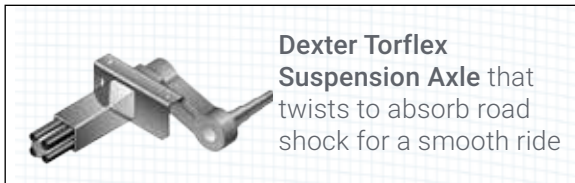

Dexter Torflex Suspension Axle that twists to absorb road shock for a smooth ride

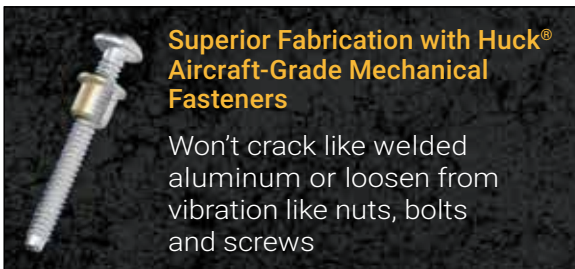

Superior Fabrication with Huck® Aircraft-Grade Mechanical Fasteners

Won't crack like welded aluminum or loosen from vibration like nuts, bolts and screws

